



DOOR CLOSER POWER SETTINGS

Under EN1154 door closer power sizes are recommended as follows in respect of door width.

Any fire door must be fitted with a closer size EN3 minimum, irrespective of width.

EN1154

EN1	750mm & below
EN2	750mm - 850mm
EN3	850mm - 950mm
EN4	950mm - 1100mm
EN5	1100mm - 1250mm
EN6	1250mm - 1400mm

TS68

With the TS68, dormakaba has developed a low-cost door closer which can be universally used on all common inward opening timber door types. It is particularly quick and easy to install and does not require a mounting backplate.

CERTIFIRE approved CF289
EN1154 tested, certified to ISO 9001
Non-handed, suitable for standard frame and parallel arm installation
(parallel arm fixing not suitable for fire doors)
Adjustable closing speed in two independent ranges
Optional hold-open
(not permitted on fire doors)
Silver or gold finish

EN 2/3/4



TS71

The dormakaba TS71 is non-handed door closer which is easily fitted. For inward opening doors.

CERTIFIRE approved CF268
-for door types ITT 120 and MM/IMM 240
-fully insulated

EN1154 tested, certified to ISO 9001
Non-handed, CE marked
Adjustable closing speed by two separate valves
Optional hold-open (not permitted on fire doors)
Silver or gold finish

EN 3/4



TS83

The dormakaba TS83 is non-handed multi-function, multi-purpose door closer which is easily fitted. Optimum wall and door protection thanks to "thinking" backcheck.
For inward and outward opening doors.

CERTIFIRE approved CF118
-for door types ITT 120 and MM/IMM 240
-fully insulated

EN1154 tested, certified to ISO 9001
Non-handed, CE marked
Adjustable closing speed by two separate valves
Optional hold-open (not permitted on fire doors)
Silver or gold finish

EN 2/3/4/5




7104

Mechanical digital door lock

60mm-70mm adjustable tubular mortice latch

Light duty applications



Finish

Spare latch

7104 26D41

Satin chrome

54444 26D01

7104 0341

Brassed


54444 0301

7106

Mechanical digital door lock

60mm rim mounted night latch

Light duty applications

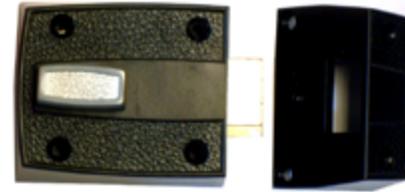

Finish

Spare latch

7106 26D41

Satin chrome

4027 5091 941

6204

Mechanical digital door lock for heavy duty applications

Durable hammered paint finish

Fire rated tubular mortice latch



Finish

Spare latch

6204 8641

Hammered grey

201961126D01

6204 6041

Hammered gold


201961126D01

900

Mechanical digital door lock

Rim mounted with anti-thrust latch

Optional key over-ride

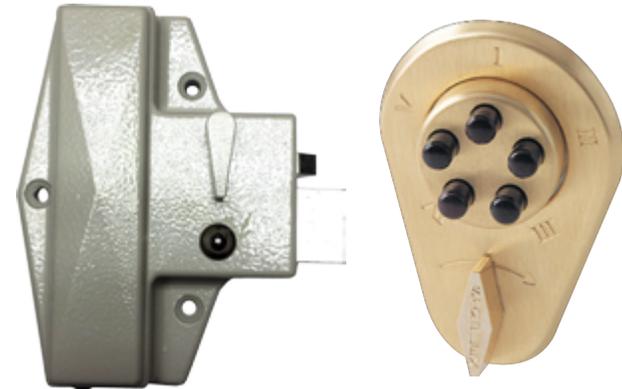

Finish

919 26D41

Satin chrome

Non key over-ride

919 0441

Satin brass

Non key over-ride

938 26D41

Satin chrome

Key over-ride

938 0441

Satin brass

Key over-ride

5021

Heavy duty mechanical digital door lock

3 hour UL fire rating

Key over-ride

Reversible lever handle



Finish

Spare latch

5021 XKWL 26D41

Satin chrome

2019611 26D41

KEYLEX

Lever handle mechanical digital door lock reversible

Passage function
Slim design
60mm - 70mm latch with anti-thrust snib



Finish

SECDXL 22203 PTSC

Satin chrome

1000

Heavy duty mechanical digital door lock

3 hour UL fire rating

The lock is wear-tested for intensive use

Using IC core over-ride (not included)



Finish

1011 26D41

Satin chrome

Non key over-ride

1011 0341

Brass

Non key over-ride

1021B 26D41

Satin chrome

Key over-ride

1021B 0341

Brass

Key over-ride

P-DL02-SC

Yale push button door lock

60mm backset

Easy code change

Hold open

Satin chrome



Finish

P-DL02-SC

Satin chrome

Non hold open